


The **CIAOradio L101** is a portable **0.1–30 MHz Active Wideband Loop** .

When connected and powered through an USB interface or an external power supply or mechanically and electrically connected as piggy back second floor of a **CIAOradio H101** receiver test-set ,acts as a 0.1–30 MHz active wideband loop without the need of tuning. The loop can be rolled till diameters of 25cm .

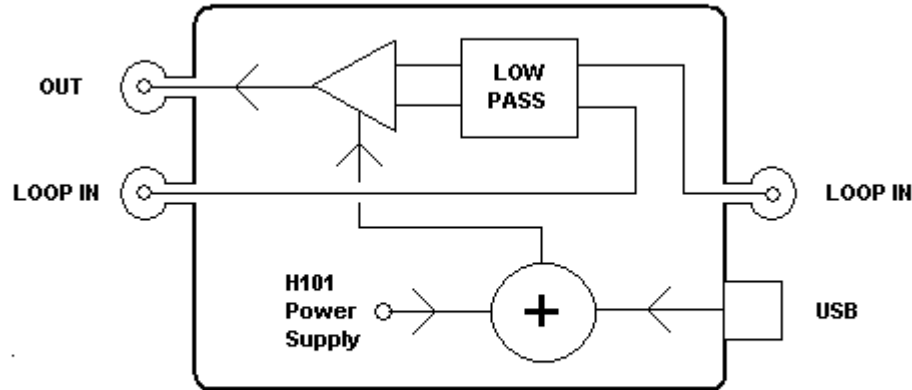

L101 100Khz- 30Mhz ACTIVE LOOP

Interfaces

- USB – EXT POWER SUPPLY (max 15 V).
- N.2 LOOP inputs (F connectors)
- ANTENNA OUTPUT (BNC)

Specifications

- Flatness : +/- 3dB 100Khz–30 Mhz
- IP3 : +42 dBm at 10 Mhz – 12 V
- 87.5-108 Mhz Attenuation : >40dB
- Power Supply : < 50 mA at 12 V .
- Case Dimensions:12 x 12 x 3.5cm
- Loop Diameter : 60cm
- Weight: 250 g
- Operating temperature:10-40 °C



Contact
Sistel di Re Claudio
Str. Valpiana n.8
10132-Torino
Italy
Phone : +39-011-8996406
Fax : +39-011-8981171
E-mail :ReClaudio@alma.it
http: www.comsistel.com



Product improvements can change specification without notice.
This information may not be copied in whole or in part without Sistel written permission.